

# SNMP MIB Guide

Synology

# Table of Contents

<b>Introduction</b>	2
<b>Supported MIB files</b>	3
<b>Synology MIB files</b>	6
Synology System MIB (OID: .1.3.6.1.4.1.6574.1)	7
Synology Disk MIB (OID: .1.3.6.1.4.1.6574.2)	8
Synology RAID MIB (OID: .1.3.6.1.4.1.6574.3)	11
Synology UPS MIB (OID: .1.3.6.1.4.1.6574.4)	13
Synology Smart MIB (OID: .1.3.6.1.4.1.6574.5)	14
Synology Services MIB (OID: .1.3.6.1.4.1.6574.6)	15
Synology StorageIO MIB (OID: .1.3.6.1.4.1.6574.101)	15
Synology SpacelO MIB (OID: .1.3.6.1.4.1.6574.102)	17
Synology FlashCache MIB (OID: .1.3.6.1.4.1.6574.103)	18
Synology iSCSI LUN MIB (OID: .1.3.6.1.4.1.6574.104)	20
Synology Ebox MIB (OID: .1.3.6.1.4.1.6574.105)	22
Synology SHA MIB (OID: .1.3.6.1.4.1.6574.106)	23
Synology NFS MIB (OID: .1.3.6.1.4.1.6574.107)	25
Synology GPUInfo MIB (OID: .1.3.6.1.4.1.6574.108)	26
Synology Port MIB (OID: .1.3.6.1.4.1.6574.109)	27
Synology iSCSI Target MIB (OID: .1.3.6.1.4.1.6574.110)	28
Synology SMB Service MIB (OID: .1.3.6.1.4.1.6574.111)	29
Synology MailPlus MIB (OID: .1.3.6.1.4.1.6574.201)	36
<b>Useful OIDs</b>	41
<b>Monitor Specific OIDs</b>	45
Import MIB Files	45
Set up the NMS	47
<b>Document Revision History</b>	49
<b>Copyright and Disclaimer Notices</b>	50

# Introduction

Synology's operating systems, including DiskStation Manager (DSM), Synology Router Manager (SRM), and ActiveProtect Manager (APM), allow users to monitor the status of their Synology servers through Network Management Systems (NMS) via Simple Network Management Protocol (SNMP). However, Synology DSM does not provide SNMP trap capability.

This document introduces Management Information Base (MIB) files of Synology servers. It focuses on which MIB files are supported by Synology's operating systems, while also describes how Object Identifiers (OIDs) in Synology MIBs are used with your preferred NMS software. Users are encouraged to have experience and knowledge of NMS and SNMP before consulting this document.

# Supported MIB files

DSM, SRM, and APM support numerous MIB files that can help users monitor different information on their Synology NAS/IP SAN (hereinafter referred to as Synology servers). Table 2-1 shows the MIBs supported by DSM and SRM.

These MIB files can be separated into two types: general SNMP MIB and Synology MIB. General SNMP MIB files are equipped on NMS clients natively.

Synology MIB files can provide specific data about a Synology server system, disks, RAID, and connected UPS devices. Please see the “Synology MIB Files” section below for more Synology MIB information.

You can download the Synology MIB file [here](#).

## Notes:

For all tables in this document, unless otherwise noted, DSM denotes that this OID is compatible with DSM 6.2.4 and above, and DSM UC denotes that this OID is compatible with DSM UC 3.0.

**Table 2-1 General MIB Files Supported by DSM**

MIB	Explanation
DISMAN-EVENT-MIB	For defining event triggers and actions for network management purposes
DISMAN-SCHEDULE-MIB	For scheduling SNMP set operations periodically or at specific points in time
HOST-RESOURCES-MIB	For use in managing host systems
IF-MIB	For describing network interface sub-layers
IP-FORWARD-MIB	For the management of CIDR multipath IP Routes
IP-MIB	For IP and ICMP management objects
IPV6-ICMP-MIB	For entities implementing the ICMPv6
IPV6-MIB	For entities implementing the IPv6 protocol
IPV6-TCP-MIB	For entities implementing TCP over IPv6

IPV6-UDP-MIB	For entities implementing UDP over IPv6
NET-SNMP-AGENT-MIB	For monitoring structures for the Net-SNMP agent
NET-SNMP-EXTEND-MIB	For scripted extensions for the Net-SNMP agent
NET-SNMP-VACM-MIB	Defines Net-SNMP extensions to the standard VACM view table
NOTIFICATION-LOG-MIB	For logging SNMP Notifications
SNMP-COMMUNITY-MIB	To help support coexistence between SNMPv1, SNMPv2c, and SNMPv3
SNMP-FRAMEWORK-MIB	The SNMP Management Architecture MIB
SNMP-MPD-MIB	For Message Processing and Dispatching
SNMP-USER-BASED-SM-MIB	For the SNMP User-based Security Model
SNMP-VIEW-BASED-ACM-MIB	For the View-based Access Control Model for SNMP
SNMPv2-MIB	For SNMP entities
SYNOLOGY-DISK-MIB	For Synology disk information (Synology only)
SYNOLOGY-EBOX-MIB	For Synology ebox information (Synology only)
SYNOLOGY-FLASHCACHE-MIB	For Synology FlashCache information (Synology only)
SYNOLOGY-GPUINFO-MIB	For Synology GpuIO information (Synology only)
SYNOLOGY-ISCSILUN-MIB	For Synology iSCSI LUN information (Synology only)
SYNOLOGY-ISCSITarget-MIB	For Synology iSCSI Target information (Synology only)
SYNOLOGY-NFS-MIB	For Synology NFS information (Synology only)

SYNOLOGY-PORT-MIB.txt	For Synology Ethernet Port information (Synology only)
SYNOLOGY-RAID-MIB	For Synology RAID information (Synology only)
SYNOLOGY-SERVICES-MIB	For Synology services information (Synology only)
SYNOLOGY-SHA-MIB	For Synology High-Availability information (Synology only)
SYNOLOGY-SMART-MIB	For Synology smart information (Synology only)
SYNOLOGY-SPACEIO-MIB	For Synology SpacelIO information (Synology only)
SYNOLOGY-STORAGE-IO-MIB	For Synology StoragelIO information (Synology only)
SYNOLOGY-SYSTEM-MIB	For Synology system information (Synology only)
SYNOLOGY-UPS-MIB	For Synology UPS information (Synology only)
SYNOLOGY-MAILPLUSS-MIB	For Synology MailPlus Server information (Synology only)
TCP-MIB	For managing TCP implementations
UCD-DISKIO-MIB	For disk IO statistics
UCD-DLMOD-MIB	For dynamic loadable MIB modules
UCD-SNMP-MIB	For private UCD SNMP MIB extensions
UDP-MIB	For managing UDP implementations
SYNOLOGY-SMB-MIB	For Synology SMB information (Synology only)

# Synology MIB files

The following Synology MIB files are provided in DSM and APM. These MIB files are the child-nodes of OID (Object Identifier) 1.3.6.1.4.1.6574. Table 3-1 shows the exact OID of each MIB. Please note that the MIB files are mutually dependent. Before your NMS can monitor any of the items in these MIB files, please make sure that all of them have been imported together and use SNMPv2c to obtain the complete Synology OID information.

**Table 3-1 OID of Synology MIBs**

OID	Name	File Name	Last updated version
.1.3.6.1.4.1.6574.1	synoSystem	SYNOLOGY-SYSTEM-MIB.txt	DSM 7.2, APM 1.0
.1.3.6.1.4.1.6574.2	synoDisk	SYNOLOGY-DISK-MIB.txt	DSM 7.1, APM 1.0
.1.3.6.1.4.1.6574.3	synoRaid	SYNOLOGY-RAID-MIB.txt	DSM 7.0, APM 1.0
.1.3.6.1.4.1.6574.4	synoUPS	SYNOLOGY-UPS-MIB.txt	DSM 6.0.1, APM 1.0
.1.3.6.1.4.1.6574.5	synologyDiskSMART	SYNOLOGY-SMART-MIB.txt	DSM 6.0.1
.1.3.6.1.4.1.6574.6	synologyService	SYNOLOGY-SERVICES-MIB.txt	DSM 6.2.1, APM 1.0
.1.3.6.1.4.1.6574.101	storageIO	SYNOLOGY-STORAGEIO-MIB.txt	DSM 6.1.7, APM 1.0
.1.3.6.1.4.1.6574.102	spaceIO	SYNOLOGY-SPACEIO-MIB.txt	DSM 6.0.1, APM 1.0
.1.3.6.1.4.1.6574.103	flashCache	SYNOLOGY-FLASHCACHE-MIB.txt	DSM 7.0, APM 1.0
.1.3.6.1.4.1.6574.104	synologyiSCSILUN	SYNOLOGY-ISCSILUN-MIB.txt	DSM 6.1.7, APM 1.0
.1.3.6.1.4.1.6574.105	synologyEbox	SYNOLOGY-EBOX-MIB	DSM 6.2.1

.1.3.6.1.4.1.6574.106	synologyHA	SYNOLOGY-SHA-MIB	DSM 6.2.2
.1.3.6.1.4.1.6574.107	NFS	SYNOLOGY-NFS-MIB.txt	DSM 7.0, APM 1.0
.1.3.6.1.4.1.6574.108	GpuInfo	SYNOLOGY-GPUINFO-MIB.txt	DSM 6.2.2
.1.3.6.1.4.1.6574.109	synoEthPort	SYNOLOGY-PORT-MIB.txt	SRM 1.2.5
.1.3.6.1.4.1.6574.110	synologyiSCSITarget	SYNOLOGY-ISCSITarget-MIB	DSM 7.0
.1.3.6.1.4.1.6574.201	mailplus	SYNOLOGY-MAILPLUS-MIB.txt	DSM 7.2

## Synology System MIB (OID: .1.3.6.1.4.1.6574.1)

The Synology System MIB provides comprehensive system status information, including temperature and fan status, allowing users to monitor system functionality. Refer to Table 3-2 for detailed information available in the System MIB.

**Table 3-2 System MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	systemStatus	Integer	Normal (1) Failed (2)	System partition status	DSM, DSM UC, APM
.2	temperature	Integer	-	Temperature of this NAS	DSM, DSM UC, APM
.3	powerStatus	Integer	Normal (1) Failed (2)	Returns error if power supplies fail	DSM, DSM UC, APM
.4.1	systemFanStatus	Integer	Normal (1) Failed (2)	Returns error if system fan fails	DSM, DSM UC, APM
.4.2	cpuFanStatus	Integer	Normal (1) Failed (2)	Returns error if CPU fan fails	DSM, DSM UC, APM
.5.1	modelName	String	-	Model name of this NAS	DSM, DSM UC, APM
.5.2	serialNumber	String	-	Model serial number	DSM, DSM UC, APM



.5.3	version	String	-	The version of DSM	DSM, DSM UC, APM
.5.4	upgradeAvailable	Integer	Available (1) Unavailable (2) Connecting (3) Disconnected (4) Others (5)	Checks whether a new version or update of DSM is available	DSM, DSM UC
.6	controllerNumber	Integer	Controller A (0) Controller B (1)	The controller number	DSM UC
.7.1	cpuUtilization	Integer	-	Utilization (%) is the sum of user and system CPU usage	DSM, APM
.7.2	memUtilization	Integer	-	Utilization (%) is the sum of memory usage	DSM, APM
.8	thermalStatus	Integer	Normal (1) Failed (2)	Returns error if thermal status is abnormal	DSM, APM

## Synology Disk MIB (OID: .1.3.6.1.4.1.6574.2)

The Synology Disk MIB contains several types of information regarding hard drives, including ID, type and so on, as listed in Table 3-3. This MIB is a table in SNMP. As such, it can increase or decrease in size when disks are inserted or removed. For example, if a disk is inserted, an additional row containing relevant information will emerge. The OID DiskIndex (.1) is reserved for an index of table rows and cannot be accessed. Table 3-4 describes the contents of each DiskStatus in detail.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.2.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.2.1.1.3" can be used to get the disk model.

**Table 3-3 Disk MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
-----	------	------	-------------	-------------	--------------

.1	diskIndex	Integer	-	Used internally for SNMP table and not accessible	DSM, DSM UC, APM
.2	diskID	String	-	Disk name in DSM	DSM, DSM UC, APM
.3	diskModel	String	-	Disk model	DSM, DSM UC, APM
.4	diskType	String	-	Disk type, e.g. SATA, SSD	DSM, DSM UC, APM
.5	diskStatus	Integer	Normal (1)*	Current disk status	DSM, DSM UC, APM
.6	diskTemperature	Integer	-	Disk temperature	DSM, DSM UC, APM
.7	diskRole	String	data *	The role of the disk in system	DSM 7.0 and above, APM
.8	diskRetry	Integer	-	The count of each disk connection retries	DSM 7.0 and above
.9	diskBadSector	Integer	-	The count of each disk I/O bad sector	DSM 7.0 and above
.10	diskIdentifyFail	Integer	-	The count of each disk identify fails	DSM 7.0 and above
.11	diskRemainLife	Integer	-	The estimate remain life of each disk	DSM 7.0 and above, APM
.12	diskName	String	-	Disk name which will keep the same value in different DSM version	DSM 7.0 and above, APM
.13	diskHealthStatus	Integer	Normal (1)*	Current disk health status	DSM 7.1 and above, APM

- For diskStatus details, see [Table 3-4](#)
- For diskRole details, see [Table 3-5](#)
- For diskHealthStatus details, see [Table 3-6](#)

**Table 3-4 DiskStatus Explanation**

Status	Explanation	Supported OS
Normal (1)	The disk is functioning normally	DSM, DSM UC, APM
Initialized (2)	The disk has system partitions but no data	DSM, DSM UC, APM
NotInitialized (3)	The disk is not partitioned	DSM, DSM UC, APM
SystemPartitionFailed (4)	Partitions on the disk are damaged	DSM, DSM UC, APM
Crashed (5)	The disk is damaged	DSM, DSM UC, APM

**Table 3-5 DiskRole Explanation**

Status	Explanation	Supported OS
data	Used by storage pool	DSM 7.0 and above, APM
hotspare	Assigned as a hot spare disk	DSM 7.0 and above, APM
ssd_cache	Used by SSD Cache	DSM 7.0 and above, APM
none	Not used by storage pool, nor hot spare, nor SSD Cache	DSM 7.0 and above, APM
unknown	Some error occurred	DSM 7.0 and above, APM

**Table 3-6 diskHealthStatus Explanation**

Status	Explanation	Supported OS
Normal (1)	The disk health status is normal.	DSM 7.1 and above, APM
Warning (2)	The disk health status is warning.	DSM 7.1 and above, APM
Critical (3)	The disk health status is critical.	DSM 7.1 and above, APM

Failing (4)	The disk health status is failing.	DSM 7.1 and above, APM
-------------	------------------------------------	---------------------------

## Synology RAID MIB (OID: .1.3.6.1.4.1.6574.3)

In addition to the disk MIB, Synology also provides an MIB for monitoring RAID status. This MIB is similar to the disk MIB in that rows will appear or disappear to reflect RAID creation and deletion. Table 3-7 lists the contents of the RAID MIB. Table 3-8 describes each RAID status in detail.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.3.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.3.1.1.3" can be used to get the RAID status.

**Table 3-7 RAID MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	raidIndex	Integer	-	Used internally for SNMP table and not accessible	DSM, DSM UC, APM
.2	raidName	String	-	The name of each RAID in DSM	DSM, DSM UC, APM
.3	raidStatus	Integer	Normal (1)*	It shows the RAID status right now	DSM, DSM UC, APM
.4	raidFreeSize	Counter64	-	The free size of volume / disk group	DSM, DSM UC, APM
.5	raidTotalSize	Counter64	-	The total size of volume / disk group	DSM, DSM UC, APM
.6	raidHotspareCnt	Integer	-	Total hotspare disks count which can protect RAID (smaller than 0 means something wrong)	DSM 7.0 and above, APM

- For RAID status details, see [Table 3-8](#)

**Table 3-8 RAID Status Explanation**

Status	Explanation
Normal (1)	RAID is functioning normally
Repairing (2) Migrating (3) Expanding (4) Deleting (5) Creating (6) RaidSyncing (7) RaidParityChecking (8) RaidAssembling (9) Canceling (10)	These statuses are shown when RAID is created or deleted
Degrade (11)	Degrade is shown when a tolerable failure of disk(s) occurs
Crashed (12)	RAID has crashed and is now read-only
DataScrubbing (13)	RAID is DataScrubbing
RaidDeploying (14)	RAID is deploying Single volume on pool
RaidUnDeploying (15)	RAID is not deploying Single volume on pool
RaidMountCache (16)	RAID is mounting SSD cache
RaidUnmountCache (17)	RAID is not mounting SSD cache
RaidExpandingUnfinishedSHR (18)	RAID continue expanding SHR if interrupted
RaidConvertSHRToPool (19)	RAID is converting Single volume on SHR to multiple volume on SHR
RaidMigrateSHR1ToSHR2 (20)	RAID is migrating SHR1 to SHR2
RaidUnknownStatus (21)	RAID status is not included in the status above

## Synology UPS MIB (OID: .1.3.6.1.4.1.6574.4)

The Synology UPS MIB provides the ability to monitor the status of a UPS device connected to the Synology servers. Please note that the available OIDs of the UPS MIB depend on what information is provided by the UPS device. If a UPS device does not provide data for a certain OID, that OID will not appear in the NMS software. Table 3-9 shows a partial UPS MIB table only. If you are interested in all OIDs, please refer to the MIB file SYNOLOGY-UPS-MIB.txt.

**Table 3-9 Partial UPS MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1.1	upsDeviceModel	String	-	UPS device model	DSM, DSM UC, APM
.1.2	upsDeviceManufacturer	String	-	UPS device manufacturer	DSM, DSM UC, APM
.1.3	upsDeviceSerial	String	-	UPS device serial number	DSM, DSM UC, APM
.2.1	upsInfoStatus	String	-	UPS device status	DSM, DSM UC, APM
.2.6.2	upsInfoMfrDate	String	-	UPS device manufacturing date	DSM, DSM UC, APM
.2.12.1	upsInfoLoadValue	Float	-	Load on UPS device (percent)	DSM, DSM UC, APM
.3.1.1	upsBatteryChargeValue	Float	-	Battery charge	DSM, DSM UC, APM
.3.1.4	upsBatteryChargeWarning	Float	-	Battery level at which UPS switches to Warning state (percent)	DSM, DSM UC, APM
.3.12	upsBatteryType	Float	-	Battery chemistry	DSM, DSM UC, APM

## Synology Smart MIB (OID: .1.3.6.1.4.1.6574.5)

The Synology SMART MIB provides SMART information for each disk in internal slots (excluding drives installed in M.2 slots and add-in cards), similar to Storage Manager. Since each disk may have different SMART attributes, one OID records a single SMART attribute and uses diskSMARTInfoDevName to indicate its corresponding disk. Note that not all S.M.A.R.T. features are supported on SAS drives.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.5.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.5.1.1.3" can be used to get the SMART attribute name.

**Table 3-10 SMART MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	diskSMARTInfoIndex	Integer	-	Used internally for SNMP table and not accessible	DSM
.2	diskSMARTInfoDevName	String	-	Describes the disk to which this SMART info belongs to	DSM
.3	diskSMARTAttrName	String	-	The name of the SMART info attribute, e.g. Raw_Read_Error_Rate	DSM
.4	diskSMARTAttrId	Integer	-	SMART attribute ID number	DSM
.5	diskSMARTAttrCurrent	Integer	-	SMART attribute current value	DSM
.6	diskSMARTAttrWorst	Integer	-	SMART attribute worst value	DSM
.7	diskSMARTAttrThreshold	Integer	-	SMART attribute threshold value	DSM
.8	diskSMARTAttrRaw	Integer	-	SMART attribute raw value	DSM
.9	diskSMARTAttrStatus	String	-	Status of this SMART info	DSM
.10	diskSMARTAttrRaw64	Counter64	-	SMART attribute raw value (64 bit VER.)	DSM

## Synology Services MIB (OID: .1.3.6.1.4.1.6574.6)

The Synology Services MIB monitors the number of users logging in via HTTP, CIFS, AFP, NFS, FTP, SFTP, TELNET, and SSH.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.6.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.6.1.1.2" can be used to get the service name.

**Table 3-11 Services MIB**

OID	Name	Type	Status Type	Explanation
.1	serviceInfoIndex	Integer	-	Used internally for services table and not accessible
.2	serviceName	String	-	The name of the service
.3	serviceUsers	Integer	-	The number of users using this service

## Synology StorageIO MIB (OID: .1.3.6.1.4.1.6574.101)

The Synology StorageIO MIB has I/O information of disks.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.101.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.101.1.1.2" can be used to get the name of the device that we are counting/checking.

**Table 3-12 StorageIO MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	storageIOIndex	Integer	-	Used internally for storageio table and not accessible	DSM, DSM UC, APM
.2	storageIODevice	String	-	The name of the device we are counting/checking	DSM, DSM UC, APM
.3	storageIONRead	Counter32	-	The number of bytes read from this device since boot (32 bit VER.)	DSM, DSM UC, APM



.4	storageIONWritten	Counter32	-	The number of bytes written to this device since boot (32 bit VER.)	DSM, DSM UC, APM
.5	storageIOReads	Counter32	-	The number of read accesses from this device since boot	DSM, DSM UC, APM
.6	storageIOWrites	Counter32	-	The number of write accesses to this device since boot	DSM, DSM UC, APM
.7	storageIOLA	Integer	-	The load of disk (%)	DSM, DSM UC, APM
.8	storageIOLA1	Integer	-	The 1-minute average load of disk (%)	DSM, DSM UC, APM
.9	storageIOLA5	Integer	-	The 5-minute average load of disk (%)	DSM, DSM UC, APM
.10	storageIOLA15	Integer	-	The-15 minute average load of disk (%)	DSM, DSM UC, APM
.11	storageIONReadX	Counter64	-	The number of bytes read from this device since boot (64 bit VER.)	DSM, DSM UC, APM
.12	storageIONWrittenX	Counter64	-	The number of bytes written to this device since boot (64 bit VER.)	DSM, DSM UC, APM
.13	storageIODeviceSerial	String		The serial number of this device	DSM UC

## Synology SpacelO MIB (OID: .1.3.6.1.4.1.6574.102)

The Synology SpacelO MIB has I/O information of volumes.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.102.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.102.1.1.2" can be used to get the name of the device where this volume is mounted.

**Table 3-13 SpaceIO MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	spaceIOIndex	Integer	-	Used internally for spaceIO table and not accessible	DSM, DSM UC, APM
.2	spaceIODevice	String	-	The name of the device this volume mounted on	DSM, DSM UC, APM
.3	spaceIONRead	Counter32	-	The number of bytes read from this volume since boot (32 bit VER.)	DSM, DSM UC, APM
.4	spaceIONWritten	Counter32	-	The number of bytes written to this volume since boot (32 bit VER.)	DSM, DSM UC, APM
.5	spaceIOReads	Counter32	-	The number of read accesses from this volume since boot	DSM, DSM UC, APM
.6	spaceIOWrites	Counter32	-	The number of write accesses to this volume since boot	DSM, DSM UC, APM
.8	spaceIOLA	Integer	-	The load of disk in the volume (%)	DSM, DSM UC, APM
.9	spaceIOLA1	Integer	-	The 1 minute average load of disk in the volume (%)	DSM, DSM UC, APM
.10	spaceIOLA5	Integer	-	The 5 minute average load of disk in the volume (%)	DSM, DSM UC, APM

.11	spaceIOLA15	Integer	-	The 15 minute average load of disk in the volume (%)	DSM, DSM UC, APM
.12	spaceIONReadX	Counter64	-	The number of bytes read from this volume since boot (64 bit VER.)	DSM, DSM UC, APM
.13	spaceIONWrittenX	Counter64	-	The number of bytes written to this volume since boot (64 bit VER.)	DSM UC
.14	spaceUUID	String	-	The UUID of this volume	DSM UC

## Synology FlashCache MIB (OID: .1.3.6.1.4.1.6574.103)

The Synology FlashCache MIB monitors the resource usage of SSD cache. The collection frequency is 5 seconds.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.103.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.103.1.1.2" can be used to get the name of the SSD on the flashcache that we are counting/checking.

### Notes:

The MIB is only suitable for the model which support SSD cache. Otherwise, it will return zero value for each OID path.

**Table 3-14 FlashCache MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	flashCacheIndex	Integer	-	Reference index for each observed device	DSM, DSM UC, APM

.2	flashCacheSSDD ev	String	-	The SSD device name on flashcache we are counting/ checking	DSM, DSM UC, APM
.3	flashCacheSpace Dev	String	-	The space device name on flashcache we are counting/ checking	DSM, DSM UC, APM
.4	flashCacheRead Hits	Counter64	-	The number of reads on flashcache	DSM, DSM UC, APM
.5	flashCacheWrite Hits	Counter64	-	The number of writes on flashcache	DSM, DSM UC, APM
.6	flashCacheDiskR ead	Counter64	-	The number of reads on disk	DSM, DSM UC, APM
.7	flashCacheDisk Write	Counter64	-	The number of writes on disk	DSM, DSM UC, APM
.8	flashCacheTotal Read	Counter64	-	The number of reads on volume with flashcache	DSM, DSM UC, APM
.9	flashCacheTotal Write	Counter64	-	The number of writes on volume with flashcache	DSM, DSM UC, APM
.10	flashCacheRead HitRate	Integer	-	The read hit rate of flashcache (%)	DSM, DSM UC, APM
.11	flashCacheWrite HitRate	Integer	-	The write hit rate of flashcache (%)	DSM, DSM UC, APM
.12	flashCacheRead SeqSkip	Counter64	-	The number of skipped sequential reads on flashcache	DSM, DSM UC, APM
.13	flashCacheWrite SeqSkip	Counter64	-	The number of skipped sequential writes on flashcache	DSM, DSM UC, APM
.14	flashCacheWrite MissSsd	Counter64	-	The number of data writes to SSD for the first time	DSM, DSM UC, APM

.15	flashCacheSsdU uid	String	-	The SSD UUID on flashcache we are counting/checking	DSM, DSM UC, APM
-----	-----------------------	--------	---	---	---------------------

## Synology iSCSI LUN MIB (OID: .1.3.6.1.4.1.6574.104)

The Synology iSCSI LUN MIB can list all the loaded LUNs and show their running information. If a LUN has been created but not loaded (e.g. when linked to a target), it will not appear in this list. The throughput is 64-bit and composed of two 32-bit integers. For example, the iSCSI LUN read throughput is composed of higher 32-bit and lower 32-bit throughput.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.104.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.104.1.1.2" can be used to get the iSCSI LUN uuid.

**Table 3-15 iSCSI LUN MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	iSCSILUNInfoInd ex	Integer	-	Used internally for iSCSI LUN table and not accessible	DSM, DSM UC, APM
.2	iSCSILUNUUID	String	-	LUN uuid	DSM, DSM UC, APM
.3	iSCSILUNName	String	-	LUN name	DSM, DSM UC, APM
.4	iSCSILUNThroug hputReadHigh	Integer	-	The higher 32 bit of read throughput	DSM, DSM UC, APM
.5	iSCSILUNThroug hputReadLow	Integer	-	The lower 32 bit of read throughput	DSM, DSM UC, APM
.6	iSCSILUNThroug hputWriteHigh	Integer	-	The higher 32 bit of write throughput	DSM, DSM UC, APM
.7	iSCSILUNThroug hputWriteLow	Integer	-	The lower 32 bit of write throughput	DSM, DSM UC, APM

.8	iSCSILUNIOpsRead	Integer	-	LUN read iops	DSM, DSM UC, APM
.9	iSCSILUNIOpsWrite	Integer	-	LUN write iops	DSM, DSM UC, APM
.10	iSCSILUNDiskLatencyRead	Integer	-	LUN read disk latency	DSM, DSM UC, APM
.11	iSCSILUNDiskLatencyWrite	Integer	-	LUN write disk latency	DSM, DSM UC, APM
.12	iSCSILUNNetworkLatencyTx	Integer	-	LUN network tx latency	DSM, DSM UC, APM
.13	iSCSILUNNetworkLatencyRx	Integer	-	LUN network rx latency	DSM, DSM UC, APM
.14	iSCSILUNIOSizeRead	Integer	-	LUN read average i/o size	DSM, DSM UC, APM
.15	iSCSILUNIOSizeWrite	Integer	-	LUN write average i/o size	DSM, DSM UC, APM
.16	iSCSILUNQueueDepth	Integer	-	Number of iSCSI commands in LUN queue	DSM, DSM UC, APM
.17	iSCSILUNType	String	-	LUN type (advanced lun, block lun, etc.)	DSM, DSM UC, APM
.18	iSCSILUNDiskLatencyAvg	Integer	-	Average latency of LUN disk	DSM 7.0 and above, APM
.19	iSCSILUNThinProvisionVolFreeMBs	Integer	-	Free space(MB) of thin provisioning lun's volume	DSM 7.0 and above, APM

## Synology Ebox MIB (OID: .1.3.6.1.4.1.6574.105)

The Synology Ebox MIB provides the power status of expansion unit connected to Synology servers. Table 3-16 shows the information provided in ebox MIB. Table 3-17 describes the content of each eboxPower and eboxRedundantPower status in detail.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.105.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.105.1.1.2" can be used to get the expansion unit model.

**Table 3-16 Ebox MIB**

OID	Name	Type	Status Type	Explanation
.1	eboxIndex	Integer	-	Expansion unit Index
.2	eboxModel	String	-	Expansion unit model
.3	eboxPower	Integer	Normal (1)*	Power status of expansion unit
.4	eboxRedundant Power	Integer	Normal (1)*	Redundant power status of expansion unit (if the ebox has no redundant power interface, this OID will not appear)

- For eboxPower and eboxRedundantPower details, see [Table 3-17](#)

**Table 3-17 Ebox Power and Redundant Power Status Explanation**

Status	Explanation
Normal (1)	The power supplies well
Poor (2)	The power supplies badly
Disconnection (3)	The power is not connected

## Synology SHA MIB (OID: .1.3.6.1.4.1.6574.106)

The Synology SHA MIB provides basic cluster information and monitors cluster status and heartbeat status.

**Table 3-18 SHA MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	activeNodeName	String	-	Hostname of active server	DSM

.2	passiveNodeName	String	-	Hostname of passive server	DSM
.3	clusterAutoFailover	Integer	true (1) false (2)	Whether cluster can failover once something went wrong	DSM
.4	clusterName	String	-	Hostname of High-Availability cluster	DSM
.5	clusterStatus	Integer	*	Status of High-Availability cluster	DSM
.6	heartbeatStatus	Integer	*	Status of heartbeat connection	DSM
.7	heartbeatTxRate	Integer	-	Transfer speed of heartbeat in kilobyte-per-second	DSM
.8	heartbeatLatency	Integer	-	Heartbeat latency in microseconds (10 <sup>-6</sup> seconds)	DSM

- For clusterStatus details, see [Table 3-19](#)
- For heartbeatStatus details, see [Table 3-20](#)

**Table 3-19 Cluster Status Explanation**

Status	Explanation	Supported OS
normal (0)	The High-Availability cluster is healthy	DSM
warning (1)	The High-Availability cluster has something went wrong. Action should be taken to resume High-Availability feature. Please refer to High-Availability Manager for more details.	DSM
critical (2)	The High-Availability cluster is in danger, and should be resolved as soon as possible. <b>Please refer to High-Availability Manager for more details.</b>	DSM



upgrading (3)	The High-Availability cluster is upgrading.	DSM
processing (4)	The High-Availability cluster is undergoing some operation.	DSM

**Table 3-20 Heartbeat Status Explanation**

Status	Explanation	Supported OS
normal (0)	The heartbeat connection is normal.	DSM
abnormal (1)	Some information about heartbeat is not available.	DSM
disconnected (2)	The High-Availability cluster loses connection to passive server through heartbeat interface, or it is currently in split-brain mode.	DSM
empty (3)	The High-Availability cluster has no passive server.	DSM

## Synology NFS MIB (OID: .1.3.6.1.4.1.6574.107)

The Synology NFS MIB monitors the maximum latency and operations of NFS. Every value will be cached for 3 seconds. Therefore, if you access a value twice within 3 seconds, you will get the same value. The maximum latency will always clear the cache and recount the value once the value has been updated.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.107.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.107.1.1.2" can be used to get the name of NFS.

**Table 3-21 NFS MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	nfsIndex	Integer	-	Used internally for NFS table and not accessible	DSM 7.0 and above, APM

.2	nfsName	String	-	The name of NFS	DSM 7.0 and above, APM
.3	nfsTotalMaxLatency	Integer	-	Maximum latency of all the NFS operations	DSM 7.0 and above, APM
.4	nfsReadMaxLatency	Integer	-	Maximum latency of the NFS read operations	DSM 7.0 and above, APM
.5	nfsWriteMaxLatency	Integer	-	Maximum latency of the NFS write operations	DSM 7.0 and above, APM
.6	nfsTotalOPS	Counter64	-	Accumulated counts of all the NFS operations	DSM 7.0 and above, APM
.7	nfsReadOPS	Counter64	-	Accumulated counts of the NFS read operations	DSM 7.0 and above, APM
.8	nfsWriteOPS	Counter64	-	Accumulated counts of the NFS write operations	DSM 7.0 and above, APM

## Synology GPUInfo MIB (OID: .1.3.6.1.4.1.6574.108)

The Synology GPUInfo MIB monitors the resource usage of GPU card. The collection frequency is 5 seconds.

### Notes:

The MIB is only available on models which supports GPU card such as the DVA3221. Otherwise, it will return zero value for each OID path.

**Table 3-22 GPUInfo MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
-----	------	------	-------------	-------------	--------------

.1	gpuInfoSupported	Integer	Supported (0) Unsupported (1)	Supported GPU	DSM
.2	gpuUtilization	Integer	-	The percentage of GPU time spent on processing user space in last 1 second	DSM
.3	gpuMemoryUtilization	Integer	-	The percentage of GPU memory usage in last 1 second	DSM
.4	gpuMemoryFree	Integer	-	The amount of currently free GPU memory in kb	DSM
.5	gpuMemoryUsed	Integer	-	The amount of currently used GPU memory in kb	DSM
.6	gpuMemoryTotal	Integer	-	The total physical GPU memory size	DSM

## Synology Port MIB (OID: .1.3.6.1.4.1.6574.109)

The Synology Port MIB defines the status of each Ethernet port, such as link status and link speed, as listed in Table 3-23. The cache interval is 5 seconds.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.109.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.109.1.1.2" can be used to get the link status of the Ethernet port.

### Notes:

The MIB is only available on models running SRM, such as RT2600ac.

**Table 3-23 Port MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	ethPortIndex	Integer32	-	Used internally for SNMP table and not accessible	SRM 1.2.5 and above
.2	ethPortStatus	Integer	unknown (1) up (2) down (3)	The link status of the Ethernet port	SRM 1.2.5 and above
.3	ethPortSpeed	Gauge32	-	The link speed of the Ethernet port in units of 1,000,000 bits per second	SRM 1.2.5 and above

## Synology iSCSI Target MIB (OID: .1.3.6.1.4.1.6574.110)

The Synology iSCSI Target MIB can list all iSCSI targets and show their basic information, such as target name, IQN and connection status.

In order to directly access a specific OID, you must use ".1.3.6.1.4.1.6574.110.1.1" as a prefix since this MIB contains the relative table and entry number. For example, ".1.3.6.1.4.1.6574.110.1.1.2" can be used to get the iSCSI target name.

**Table 3-24 iSCSI Target MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1	iSCSITargetInfoIndex	Integer32	-	Used internally for SNMP table and not accessible	DSM 7.0 and above
.2	iSCSITargetName	String	-	Name of the iSCSI target	DSM 7.0 and above
.3	iSCSITargetIQN	String	-	IQN of the iSCSI target	DSM 7.0 and above
.4	iSCSITargetConnectionStatus	String	-	Connection status of the iSCSI target	DSM 7.0 and above

## Synology SMB Service MIB (OID: .1.3.6.1.4.1.6574.111)

The Synology SMB MIB monitors SMBv2 latency and operations, with values cached for 5 seconds. If a value is accessed multiple times within this period, the same result will be returned. Latency values automatically clear the cache and recount once updated.

To directly access a specific OID, use ".1.3.6.1.4.1.6574.111.2.1" as the prefix since this MIB contains the relative table and entry numbers. For example, ".1.3.6.1.4.1.6574.111.2.1.2.1" retrieves the name of smb2\_break.

**Table 3-25 SMB Service MIB**

OID	Name	Type	Status Type	Explanation	Supported OS
.1.1.2	SMBCpuName	String	-	SMB cpu name	DSM 7.2 or above
.1.1.3	SMBCpuUser	Integer	-	SMB % cpu user	DSM 7.2 or above
.1.1.4	SMBCpuSystem	Integer	-	SMB % cpu system	DSM 7.2 or above
.2.1.2	SMBCmdName	String	-	SMB command name	DSM 7.2 or above
.2.1.2.1	SMBCmdName	String	-	Command name for SMB2/Break	DSM 7.2 or above
.2.1.2.2	SMBCmdName	String	-	Command name for SMB2/Cancel	DSM 7.2 or above
.2.1.2.3	SMBCmdName	String	-	Command name for SMB2/Close	DSM 7.2 or above
.2.1.2.4	SMBCmdName	String	-	Command name for SMB2/Create	DSM 7.2 or above
.2.1.2.5	SMBCmdName	String	-	Command name for SMB2/Find	DSM 7.2 or above
.2.1.2.6	SMBCmdName	String	-	Command name for SMB2/Flush	DSM 7.2 or above
.2.1.2.7	SMBCmdName	String	-	Command name for SMB2/GetInfo	DSM 7.2 or above

.2.1.2.8	SMBCmdName	String	-	Command name for SMB2/loctl	DSM 7.2 or above
.2.1.2.9	SMBCmdName	String	-	Command name for SMB2/KeepAlive	DSM 7.2 or above
.2.1.2.10	SMBCmdName	String	-	Command name for SMB2/Lock	DSM 7.2 or above
.2.1.2.11	SMBCmdName	String	-	Command name for SMB2/LogOff	DSM 7.2 or above
.2.1.2.12	SMBCmdName	String	-	Command name for SMB2/NegotiateProtocol	DSM 7.2 or above
.2.1.2.13	SMBCmdName	String	-	Command name for SMB2/Notify	DSM 7.2 or above
.2.1.2.14	SMBCmdName	String	-	Command name for SMB2/Read	DSM 7.2 or above
.2.1.2.15	SMBCmdName	String	-	Command name for SMB2/SessionSetup	DSM 7.2 or above
.2.1.2.16	SMBCmdName	String	-	Command name for SMB2/SetInfo	DSM 7.2 or above
.2.1.2.17	SMBCmdName	String	-	Command name for SMB2/TreeConnect	DSM 7.2 or above
.2.1.2.18	SMBCmdName	String	-	Command name for SMB2/TreeDisconnect	DSM 7.2 or above
.2.1.2.19	SMBCmdName	String	-	Command name for SMB2/Write	DSM 7.2 or above
.2.1.3	SMBCmdCMDPS	Integer	-	SMB command per second	DSM 7.2 or above
.2.1.3.1	SMBCmdCMDPS	Integer	-	Command per second for SMB2/Break	DSM 7.2 or above
.2.1.3.2	SMBCmdCMDPS	Integer	-	Command per second for SMB2/Cancel	DSM 7.2 or above
.2.1.3.3	SMBCmdCMDPS	Integer	-	Command per second for SMB2/Close	DSM 7.2 or above

.2.1.3.4	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Create	DSM 7.2 or above
.2.1.3.5	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Find	DSM 7.2 or above
.2.1.3.6	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Flush	DSM 7.2 or above
.2.1.3.7	SMBCmdCMD PS	Integer	-	Command per second for SMB2/GetInfo	DSM 7.2 or above
.2.1.3.8	SMBCmdCMD PS	Integer	-	Command per second for SMB2/loctl	DSM 7.2 or above
.2.1.3.9	SMBCmdCMD PS	Integer	-	Command per second for SMB2/KeepAlive	DSM 7.2 or above
.2.1.3.10	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Lock	DSM 7.2 or above
.2.1.3.11	SMBCmdCMD PS	Integer	-	Command per second for SMB2/LogOff	DSM 7.2 or above
.2.1.3.12	SMBCmdCMD PS	Integer	-	Command per second for SMB2/NegotiateProtocol	DSM 7.2 or above
.2.1.3.13	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Notify	DSM 7.2 or above
.2.1.3.14	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Read	DSM 7.2 or above
.2.1.3.15	SMBCmdCMD PS	Integer	-	Command per second for SMB2/SessionSetup	DSM 7.2 or above
.2.1.3.16	SMBCmdCMD PS	Integer	-	Command per second for SMB2/SetInfo	DSM 7.2 or above
.2.1.3.17	SMBCmdCMD PS	Integer	-	Command per second for SMB2/TreeConnect	DSM 7.2 or above
.2.1.3.18	SMBCmdCMD PS	Integer	-	Command per second for SMB2/TreeDisconnect	DSM 7.2 or above
.2.1.3.19	SMBCmdCMD PS	Integer	-	Command per second for SMB2/Write	DSM 7.2 or above

.2.1.4	SMBCmdAvgLatency	Integer	-	SMB command average latency	DSM 7.2 or above
.2.1.4.1	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Break in micro second	DSM 7.2 or above
.2.1.4.2	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Cancel in micro second	DSM 7.2 or above
.2.1.4.3	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Close in micro second	DSM 7.2 or above
.2.1.4.4	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Create in micro second	DSM 7.2 or above
.2.1.4.5	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Find in micro second	DSM 7.2 or above
.2.1.4.6	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Flush in micro second	DSM 7.2 or above
.2.1.4.7	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/GetInfo in micro second	DSM 7.2 or above
.2.1.4.8	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/loctl in micro second	DSM 7.2 or above
.2.1.4.9	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/KeepAlive in micro second	DSM 7.2 or above
.2.1.4.10	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Lock in micro second	DSM 7.2 or above



.2.1.4.11	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/LogOff in micro second	DSM 7.2 or above
.2.1.4.12	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/NegotiateProtocol in micro second	DSM 7.2 or above
.2.1.4.13	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Notify in micro second	DSM 7.2 or above
.2.1.4.14	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Read in micro second	DSM 7.2 or above
.2.1.4.15	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/SessionSetup in micro second	DSM 7.2 or above
.2.1.4.16	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/SetInfo in micro second	DSM 7.2 or above
.2.1.4.17	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/TreeConnect in micro second	DSM 7.2 or above
.2.1.4.18	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/TreeDisconnect in micro second	DSM 7.2 or above
.2.1.4.19	SMBCmdAvgLatency	Integer	-	Command average latency for SMB2/Write in micro second	DSM 7.2 or above
.3.1.2	SMBRWPktName	String	-	Size of the read/write packet	DSM 7.2 or above
.3.1.2.1	SMBRWPktName	String	-	Read packet of size 1024k	DSM 7.2 or above

.3.1.2.2	SMBRWPKtName	String	-	Read packet of size 16k	DSM 7.2 or above
.3.1.2.3	SMBRWPKtName	String	-	Read packet of size 256k	DSM 7.2 or above
.3.1.2.4	SMBRWPKtName	String	-	Read packet of size 4k	DSM 7.2 or above
.3.1.2.5	SMBRWPKtName	String	-	Read packet of size 64k	DSM 7.2 or above
.3.1.2.6	SMBRWPKtName	String	-	Read packet of size over 1024k	DSM 7.2 or above
.3.1.2.7	SMBRWPKtName	String	-	Write packet of size 1024k	DSM 7.2 or above
.3.1.2.8	SMBRWPKtName	String	-	Write packet of size 16k	DSM 7.2 or above
.3.1.2.9	SMBRWPKtName	String	-	Write packet of size 256k	DSM 7.2 or above
.3.1.2.10	SMBRWPKtName	String	-	Write packet of size 4k	DSM 7.2 or above
.3.1.2.11	SMBRWPKtName	String	-	Write packet of size 64k	DSM 7.2 or above
.3.1.2.12	SMBRWPKtName	String	-	Write packet of size over 1024k	DSM 7.2 or above
.3.1.3	SMBRWPKtPS	Integer	-	SMB RW packets per second	DSM 7.2 or above
.3.1.3.1	SMBRWPKtPS	Integer	-	Read packet count of size 1024k per second	DSM 7.2 or above
.3.1.3.2	SMBRWPKtPS	Integer	-	Read packet count of size 16k per second	DSM 7.2 or above
.3.1.3.3	SMBRWPKtPS	Integer	-	Read packet count of size 256k per second	DSM 7.2 or above
.3.1.3.4	SMBRWPKtPS	Integer	-	Read packet count of size 4k per second	DSM 7.2 or above

.3.1.3.5	SMBRWPKtPS	Integer	-	Read packet count of size 64k per second	DSM 7.2 or above
.3.1.3.6	SMBRWPKtPS	Integer	-	Read packet count of size over 1024k per second	DSM 7.2 or above
.3.1.3.7	SMBRWPKtPS	Integer	-	Write packet count of size 1024k per second	DSM 7.2 or above
.3.1.3.8	SMBRWPKtPS	Integer	-	Write packet count of size 16k per second	DSM 7.2 or above
.3.1.3.9	SMBRWPKtPS	Integer	-	Write packet count of size 256k per second	DSM 7.2 or above
.3.1.3.10	SMBRWPKtPS	Integer	-	Write packet count of size 4k per second	DSM 7.2 or above
.3.1.3.11	SMBRWPKtPS	Integer	-	Write packet count of size 64k per second	DSM 7.2 or above
.3.1.3.12	SMBRWPKtPS	Integer	-	Write packet count of size over 1024k per second	DSM 7.2 or above
.3.1.4	SMBRWPKtAvgLatency	Integer	-	SMB RW packets avg latency	DSM 7.2 or above
.3.1.4.1	SMBRWPKtAvgLatency	Integer	-	Read packet average latency of size 1024k in micro second	DSM 7.2 or above
.3.1.4.2	SMBRWPKtAvgLatency	Integer	-	Read packet average latency of size 16k in micro second	DSM 7.2 or above
.3.1.4.3	SMBRWPKtAvgLatency	Integer	-	Read packet average latency of size 256k in micro second	DSM 7.2 or above
.3.1.4.4	SMBRWPKtAvgLatency	Integer	-	Read packet average latency of size 4k in micro second	DSM 7.2 or above
.3.1.4.5	SMBRWPKtAvgLatency	Integer	-	Read packet average latency of size 64k in micro second	DSM 7.2 or above

.3.1.4.6	SMBRWPktAverageLatency	Integer	-	Read packet average latency of size over 1024k in micro second	DSM 7.2 or above
.3.1.4.7	SMBRWPktAverageLatency	Integer	-	Write packet average latency of size 1024k in micro second	DSM 7.2 or above
.3.1.4.8	SMBRWPktAverageLatency	Integer	-	Write packet average latency of size 16k in micro second	DSM 7.2 or above
.3.1.4.9	SMBRWPktAverageLatency	Integer	-	Write packet average latency of size 256k in micro second	DSM 7.2 or above
.3.1.4.10	SMBRWPktAverageLatency	Integer	-	Write packet average latency of size 4k in micro second	DSM 7.2 or above
.3.1.4.11	SMBRWPktAverageLatency	Integer	-	Write packet average latency of size 64k in micro second	DSM 7.2 or above
.3.1.4.12	SMBRWPktAverageLatency	Integer	-	Write packet average latency of size over 1024k in micro second	DSM 7.2 or above

## Synology MailPlus MIB (OID: .1.3.6.1.4.1.6574.201)

The Synology MailPlus MIB monitors mail-related information, including mail delivery results, threat events, mail queue, IMAP, POP3, SMTP connections, and service status. In a MailPlus high-availability (HA) setup, delivery (.1.3.6.1.4.1.6574.201.1) and threat (.1.3.6.1.4.1.6574.201.2) numbers are taken from the primary server's transaction log and include data from both servers. By default, the secondary server does not record transaction logs but relies on log transfers from the primary server.

While delivery and threat data reflect activities on both servers, the mail queue, IMAP, POP3, SMTP connections, and service status (.1.3.6.1.4.1.6574.201.3 - .1.3.6.1.4.1.6574.201.6) numbers are based solely on the local server's activities.

### Table 3-26 MailPlus MIB

OID	Name	Type	Status Type	Explanation	Supported OS
.1.1	deliverySent	Integer	-	The number of emails sent in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.1.2	deliveryReceived	Integer	-	The number of emails received in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.1.3	deliveryBounce	Integer	-	The number of emails bounced in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.1.4	deliveryDeferred	Integer	-	The number of emails deferred in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.1.5	deliveryExpired	Integer	-	The number of emails expired in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.1.6	deliveryForwarded	Integer	-	The number of emails forwarded in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.1.7	deliveryDeletedInQueue	Integer	-	The number of emails deleted from the queue in the past 10 minutes on MailPlus Server	DSM 7.2 and above
.2.1	threatDataProtection	Integer	-	The number of MCP (Message Content Protection) incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above

.2.2	threatDmarc	Integer	-	The number of DMARC incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.3	threatSpf	Integer	-	The number of SPF incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.4	threatSpam	Integer	-	The number of spam incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.5	threatDnsbl	Integer	-	The number of DNSBL incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.6	threatDkim	Integer	-	The number of DKIM incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.7	threatMalicious Content	Integer	-	The number of malicious content incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.8	threatAttachmentFilter	Integer	-	The number of attachment filter incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.2.9	threatVirus	Integer	-	The number of virus incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above

.2.10	threatsBlocklist	Integer	-	The number of block list incidents occurred on MailPlus Server in the past 10 minutes	DSM 7.2 and above
.3.1	queueMaildrop	Integer	-	The number of emails in the maildrop queue	DSM 7.2 and above
.3.2	queueActive	Integer	-	The number of emails in the active queue	DSM 7.2 and above
.3.3	queueIncoming	Integer	-	The number of emails in the incoming queue	DSM 7.2 and above
.3.4	queueDeferred	Integer	-	The number of emails in the deferred queue.	DSM 7.2 and above
.3.5	queueHold	Integer	-	The number of emails in the hold queue	DSM 7.2 and above
.4.1	connectionImap	Integer	-	The number of connections via IMAP	DSM 7.2 and above
.4.2	connectionPop3	Integer	-	The number of connections via POP3	DSM 7.2 and above
.5.1	smtpInbound	Integer	-	The number of inbound SMTP connections	DSM 7.2 and above
.5.2	smtpOutbound	Integer	-	The number of outbound SMTP connections	DSM 7.2 and above
.6.1	servicePostfix	Integer	Running (0)*	The status of Postfix service	DSM 7.2 and above
.6.2	serviceDovecot	Integer	Running (0)*	The status of Dovecot service	DSM 7.2 and above

- For servicePostfix and serviceDovecot details, see [Table 3-27](#)

**Table 3-27 Postfix Service and Dovecot Service Status Explanation**

Status	Explanation
Running (0)	The service is up and running as expected.
Abnormal (1)	The service is currently inactive and not running.
Dead PID File (2)	Although the service is not running, a PID (Process ID) file exists, indicating a possible issue with the service's startup or termination process.
Port Not Listening (3)	The service is running, but its utilized ports are not actively listening for connections.
Unknown (6)	The status of the service cannot be definitively determined. It may be inactive when it should be running or active when it should be inactive.



# Useful OIDs

Although there are many native MIB files supported by Synology, user may be interested in specific information about the Synology servers, such as CPU, memory and so on. The tables below list the native OIDs related to load, CPU, memory, network and disk for gathering useful device's data easily.

**Table 4-1 CPU-Related OID**

OID	Name	Explanation	Supported OS
.1.3.6.1.4.1.2021.10.1.5.1	laLoadInt.1	System load average within the last 1 minute	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.10.1.5.2	laLoadInt.2	System load average within the last 5 minutes	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.10.1.5.3	laLoadInt.3	System load average within the last 15 minutes	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.11.9.0	ssCpuUser	The percentage of CPU time spent processing user-level code	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.11.10.0	ssCpuSystem	The percentage of CPU time spent processing system-level code, calculated over the last minute	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.11.11.0	ssCpuIdle	The percentage of processor time spent idle, calculated over the last minute	DSM, DSM UC, APM

**Table 4-2 Memory-Related OID**

OID	Name	Explanation	Supported OS
.1.3.6.1.4.1.2021.4.3.0	memTotalSwap	The total amount of swap space configured for this host	DSM, DSM UC, APM

.1.3.6.1.4.1.2021.4.4.0	memAvailSwap	The amount of swap space currently unused or available	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.4.5.0	memTotalReal	The total amount of real/physical memory	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.4.6.0	memAvailReal	The amount of real/physical memory currently unused or available	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.4.11.0	memTotalFree	The total amount of memory free or available for use on this host (This value typically covers both real memory and swap space or virtual memory.)	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.4.13.0	memShared	The total amount of real or virtual memory currently allocated for use as shared memory	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.4.14.0	memBuffer	The total amount of real or virtual memory currently allocated for use as memory buffers	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.4.15.0	memCached	The total amount of real or virtual memory currently allocated for use as cached memory	DSM, DSM UC, APM

**Table 4-3 Network-Related OID**

OID	Name	Explanation	Supported OS
.1.3.6.1.2.1.31.1.1.1.1	ifName	The textual name of the interface	DSM, DSM UC, APM
.1.3.6.1.2.1.31.1.1.1.6	ifHCInOctets	The total number of octets received on the interface	DSM, DSM UC, APM

.1.3.6.1.2.1.31.1.1.1.10	ifHCOutOctets	The total number of octets transmitted out of the interface	DSM, DSM UC, APM
--------------------------	---------------	---	------------------

**Table 4-4 Disk-Related OID**

OID	Name	Explanation	Supported OS
.1.3.6.1.2.1.25.2.3.1.3	hrStorageDescr	A description of the type and instance of the storage described by this entry	DSM, DSM UC, APM
.1.3.6.1.2.1.25.2.3.1.4	hrStorageAllocationUnits	The size, in bytes, of the data objects allocated from this pool	DSM, DSM UC, APM
.1.3.6.1.2.1.25.2.3.1.5	hrStorageSize	The size of the storage represented by this entry, in units of hrStorageAllocationUnits	DSM, DSM UC, APM
.1.3.6.1.2.1.25.2.3.1.6	hrStorageUsed	The amount of the storage represented by this entry	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.13.15.1.1.2	diskIODevice	The name of the device we are counting/checking	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.13.15.1.1.12	diskIONReadX	The number of bytes read from this device since boot	DSM, DSM UC, APM
.1.3.6.1.4.1.2021.13.15.1.1.13	diskIONWrittenX	The number of bytes written to this device since boot	DSM, DSM UC, APM
.1.3.6.1.4.1.6574.2	synoDisk	For Synology disk information (Synology only)	DSM, DSM UC, APM

**Table 4-5 System-Related OID**

OID	Name	Explanation	Supported OS
-----	------	-------------	--------------

.1.3.6.1.4.1.6574.1	synoSystem	For Synology system information (Synology only)	DSM, DSM UC, APM
---------------------	------------	---	------------------

**Table 4-6 RAID-Related OID**

OID	Name	Explanation	Supported OS
.1.3.6.1.4.1.6574.3	synoRaid	For Synology RAID information (Synology only)	DSM, DSM UC, APM

**Table 4-7 UPS-Related OID**

OID	Name	Explanation	Supported OS
.1.3.6.1.4.1.6574.4	synoUPS	For Synology UPS information (Synology only)	DSM, DSM UC, APM

# Monitor Specific OIDs

In any NMS, particular MIB files are needed in order to capture data through SNMP. Users need to import all MIB files to ensure that the NMS can resolve specific OIDs. Once imported, data can be captured by setting up the NMS. Although the means of operating different kinds of NMS may vary, the process of OID monitoring is similar. The overall procedure is as follows.

1. Import MIB file into NMS.
2. Set up the NMS to monitor specific OIDs.


The following guide demonstrates the usage of PRTG (a type of NMS) including how to import MIB files and set up monitoring for the provided OIDs. For further help regarding PRTG, please consult PRTG documentation, as the following is only intended to be a brief description of OID monitoring.

## Import MIB Files


As PRTG cannot import MIB files directly, Paessler MIB Importer is required to convert MIB files into the PRTG format:

1. Download Paessler MIB Importer from <http://www.paessler.com/tools/mibimporter> and install it on your computer.
2. Go to **Import > MIB Files**.
3. Choose **all the Synology MIB file together** and click **Open File**. All MIB files (cf. Table 2-1) must be imported together as they are mutually dependent and Paessler MIB Importer cannot load them individually.

a. If the import is successful, a window should appear.

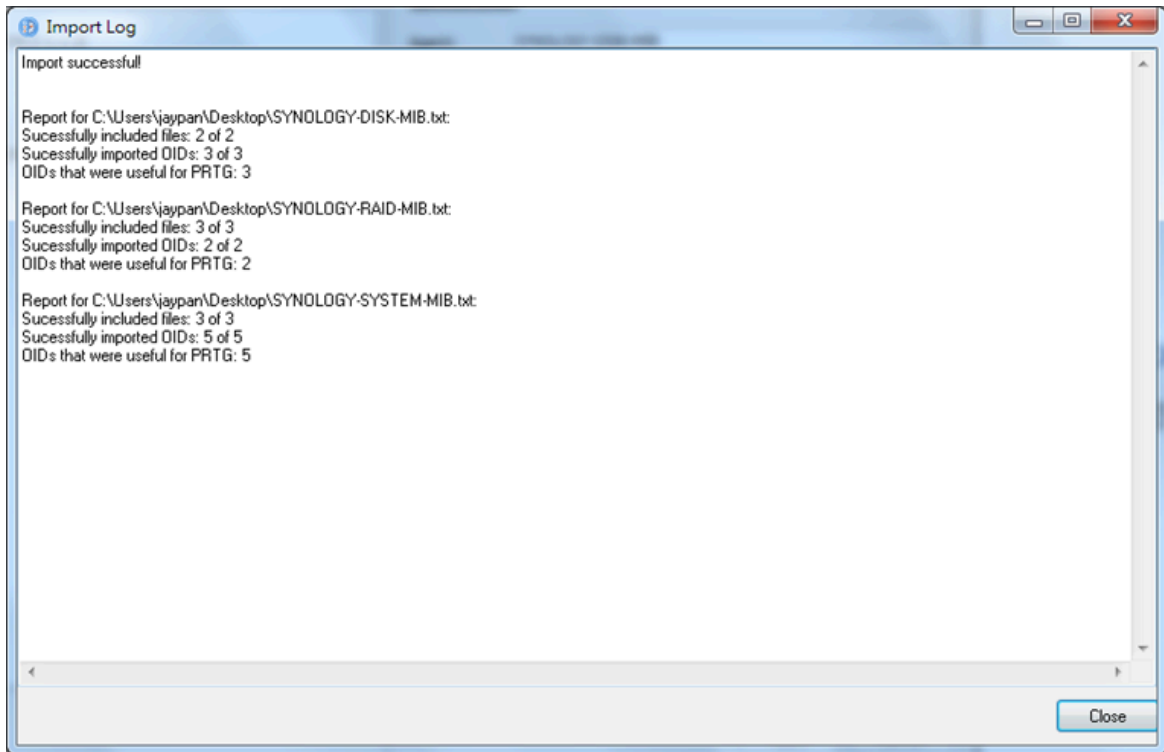

b. Detailed information on MIB is shown as follows.

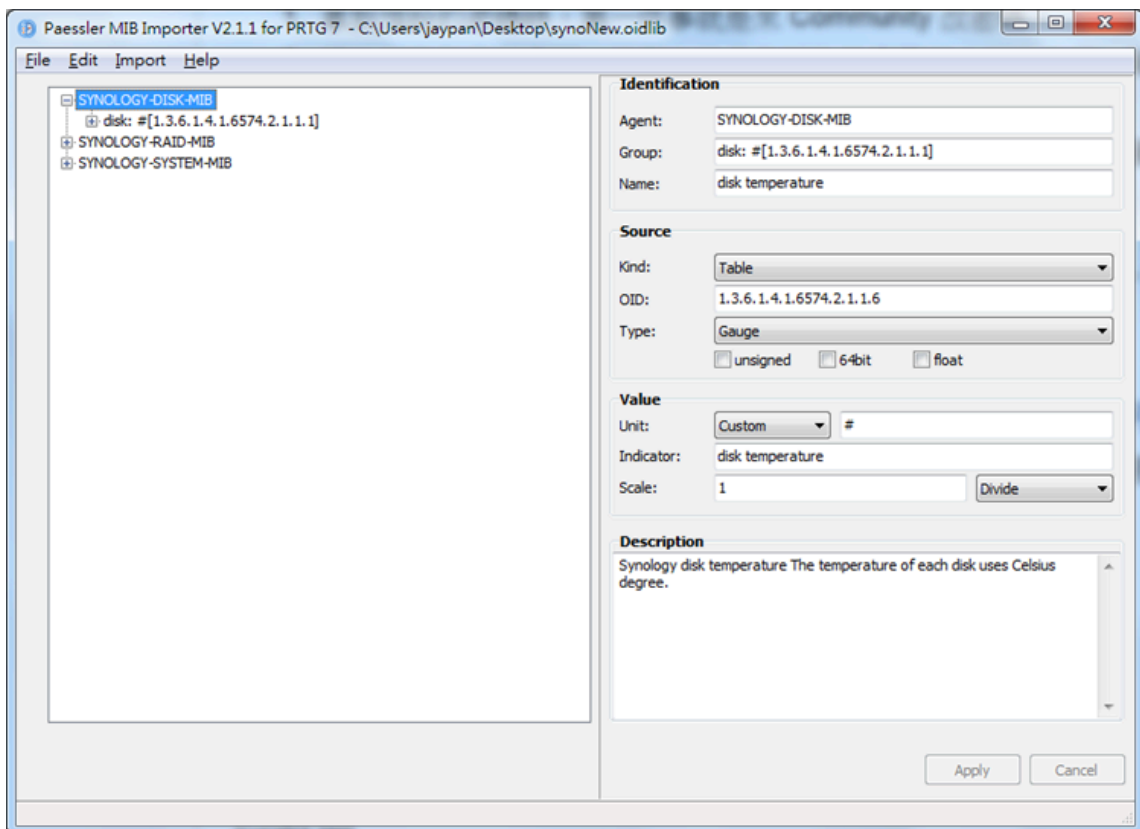


4. Go to **File > Save As** to export to the PRTG-supported format .A PRTG-supported library containing the MIB information will then be generated.


# Set up the NMS

The PRTG-supported library containing the MIB files in question should be placed into the folder: “snmplibs”. Once this has been done, specific OIDs can be set up for monitoring in PRTG. This guide assumes that your Synology servers has already been added to the devices list and focuses only on how to add OIDs for monitoring.


1. Enter the PRTG Network Monitor.
2. Go to **Sensors > Add Sensor**.

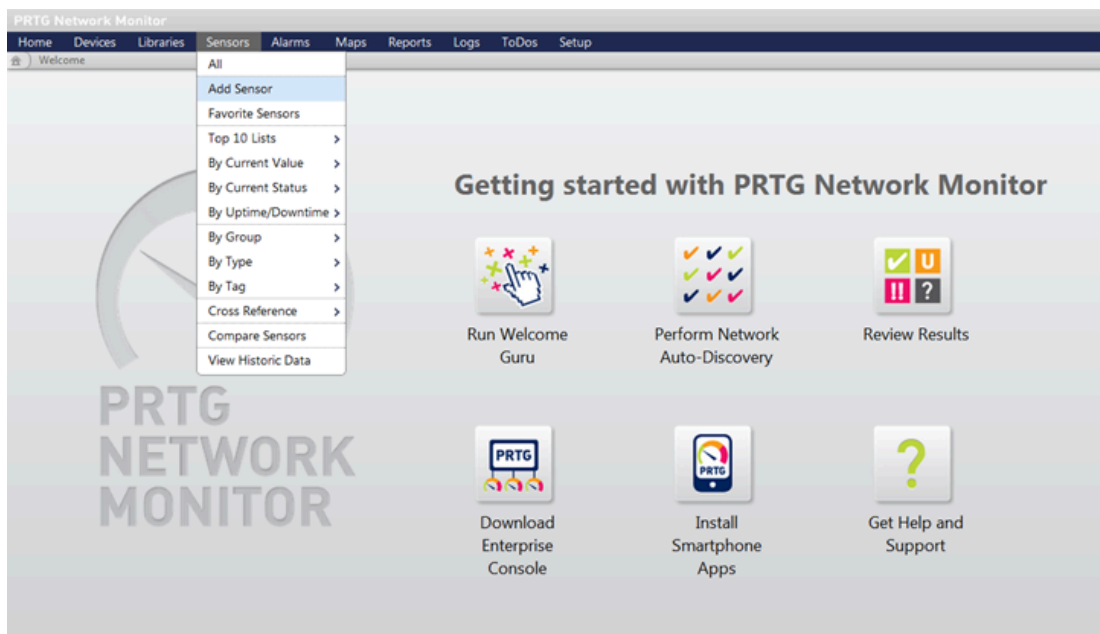


3. Click **Add sensor to an existing device** and choose a device.

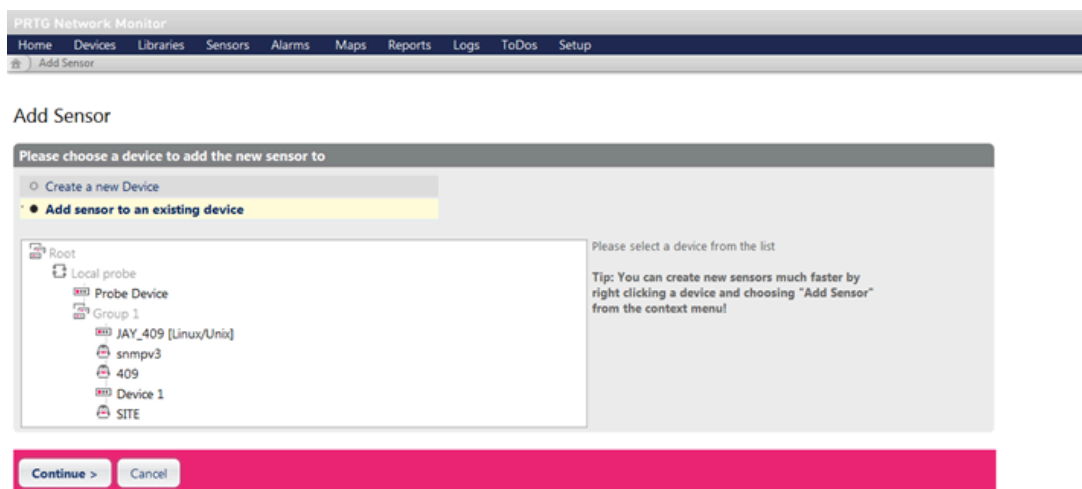

4. Choose **SNMP Library** and the library exported in the previous section.

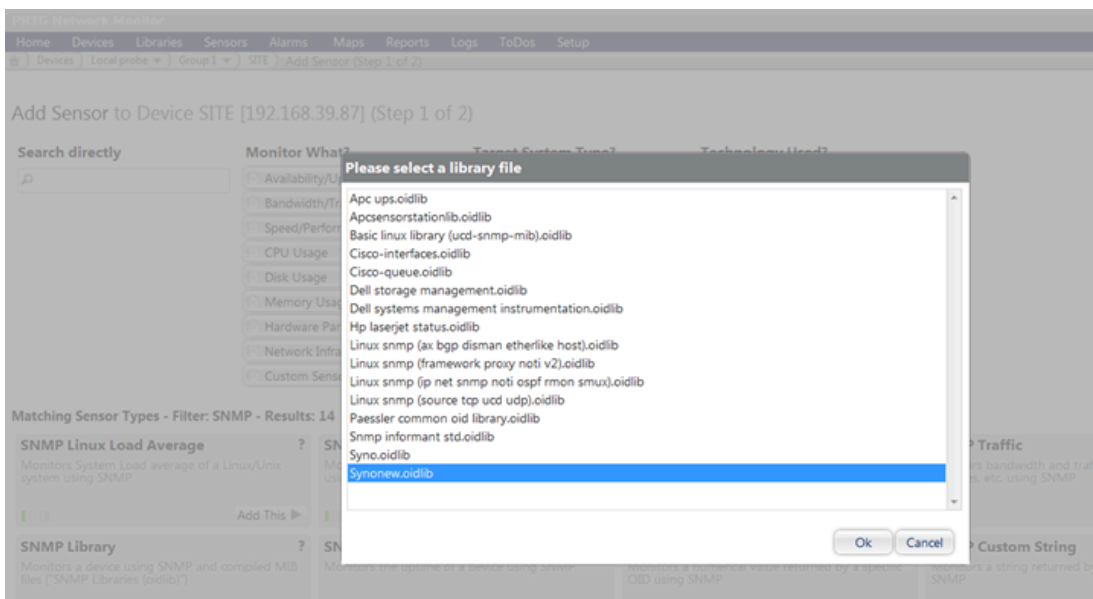

5. Select items for monitoring.

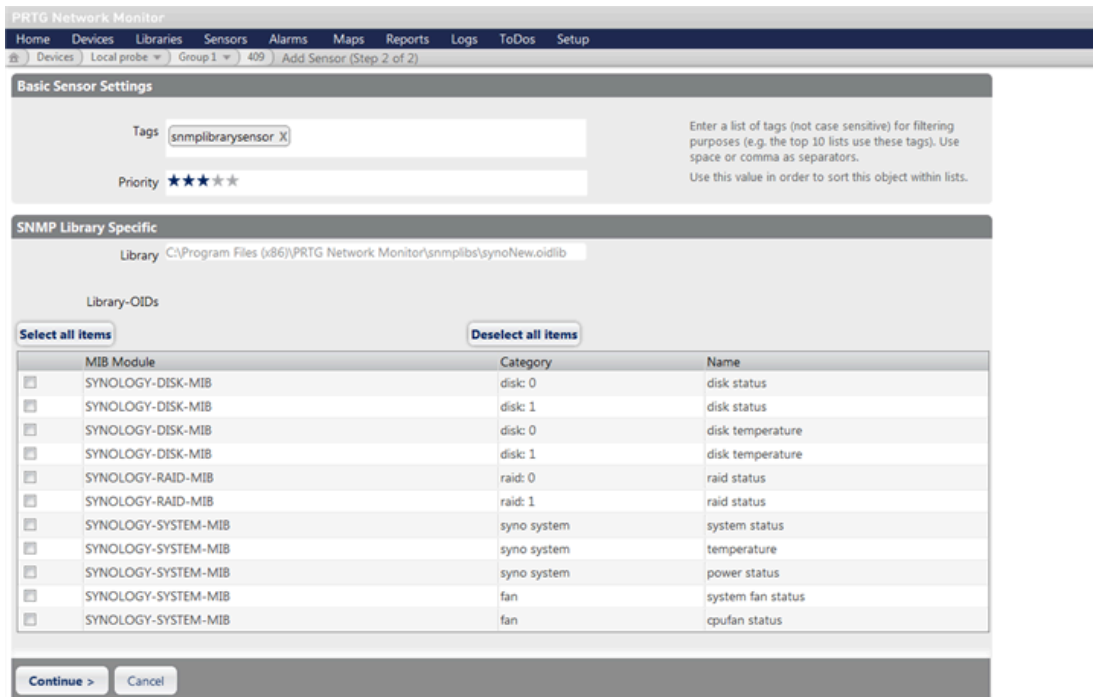



# Document Revision History

This table describes the revisions made to Synology servers MIB Guide.

**Table 6-1 Document Revision History**

MIB	Explanation
2012-07-19	Document created
2013-10-29	Modified OID name and added UPS MIB
2013-11-04	Added more MIBs and useful OID
2016-10-31	Added more MIBs
2018-06-30	Added Ebox MIB Added useful OIDs in RAID MIB
2018-12-18	Added GPUInfo MIB Added FlashCache MIB
2018-12-24	Added SHA MIB
2020-01-10	Added information for Synology Unified Controller and eGPUMIB
2021-02-23	Added PORT MIB for SRM
2021-05-25	Added NFS MIB and iSCSI Target MIB
2022-04-19	Added useful OIDs in Disk MIB
2024-07-16	Added Synology MailPlus MIB
2024-12-16	Added Synology SMB Service MIB

# Copyright and Disclaimer Notices

Synology Inc.

© 2015-2022 Synology Inc.

All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, mechanical, electronic, photocopying, recording, or otherwise, without prior written permission of Synology Inc., with the following exceptions: Any person is hereby authorized to store documentation on a single computer for personal use only and to print copies of documentation for personal use provided that the documentation contains Synology's copyright notice.

The Synology logo is a trademark of Synology Inc.

No licenses, express or implied, are granted with respect to any of the technology described in this document. Synology retains all intellectual property rights associated with the technology described in this document. This document is intended to assist application developers to develop applications only for Synology-labelled computers.

Every effort has been made to ensure that the information in this document is accurate. Synology is not responsible for typographical errors.

Synology Inc.

9F., No.1. Yuandong Rd., Banqiao Dist., New Taipei City 220, Taiwan

Synology and the Synology logo are trademarks of Synology Inc., registered in the United States and other countries.

Marvell is registered trademarks of Marvell Semiconductor, Inc. or its subsidiaries in the United States and other countries.

Freescale is registered trademarks of Freescale Semiconductor, Inc. or its subsidiaries in the United States and other countries.

Other products and company names mentioned herein are trademarks of their respective holders.

Even though Synology has reviewed this document, SYNOLOGY MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT, ITS QUALITY, ACCURACY, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS DOCUMENT IS PROVIDED "AS IS," AND YOU, THE READER, ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND ACCURACY. IN NO EVENT WILL SYNOLOGY BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT OR INACCURACY IN THIS DOCUMENT, even if advised of the possibility of such damages.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED. No Synology dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.